

# HEMERA

## Specification Sheet



Ordering Information						
Model	Length	Power		Optics	Voltage	Installation Options
HM					24	
HM	170 320 620 920 1070 1220	H   L	27 30 40  27 30 40	SP LL	24	S A EA



### Application

- Architectural and landscape lighting
- Surface mounted projector
- Adjustable brackets
- Wall grazing effect or marker light
- UL STD 1598, IP67, Wet location

### Luminaire

- Continuous run of standard lengths up to 10m (33') plug and play \*except RGBW
- IP67 connector
- High performance silicone optics
- UL STD 1598, IP67
- Extruded anodized aluminium body, powder coated
- Tempered glass cover
- Multiple installation options
- Cross section 27mm (1.06") (W), 37.2mm (1.46") (H)
- Supplied with oil and water resistant feed cable and IP68 connector - 300mm (12")
- Remote power supply

### Length

- 170mm (6.7")
- 320mm (12.6")
- 620mm (24.4")
- 920mm (36.22")
- 1070mm (42.12")
- 1220mm (48.03")

### Power

- H - 23W/m, 3150 lm/m
  - L - 10W/m, 1500 lm/m
- (delivered lumen output)

### Power Supply

On/Off
103233 - OT60 24V P
103196 - OT130 24V P
103234 - OT250 24V P

### Color Temperature

- 27 - 2700K
- 30 - 3000K
- 40 - 4000K
- 2 Step MacAdam
- CRI: > 85

### Optics

- SP - 15° angle - linear graze
- LL - opal diffused

### Voltage

- 24 - 24VDC fixture voltage

### Installation Options

- S - surface
- A - adjustable bracket
- EA - extended adjustable bracket


### Cable options

- Jumper Cable
- 201741 - L= 1m (3.3')

### Lead Cable

- 201734 - L= 1m (3.3')
- (must be specified)

170mm/320mm / 920mm / 1070mm / 1220mm  
(6.7"/12.6" / 24.4" / 36.22" / 42.12" / 48.03")




Power Supply integrated controls
102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103502 - OT 210/220-240 /1-4CH - DALI
103507 - OT250/220...240/ 24V DIM P (1-10V)


Click [here](#) for voltage drop and distances.

International: +385 52 255 324 filixlighting.com info@filixlighting.com  
 Europe/GmbH: info@filixlighting.com  
 Europe MENA: info@filixlighting.com  
 North America: filixlighting.com info@filixlighting.com


Filix reserves the right to make technical changes without notice.

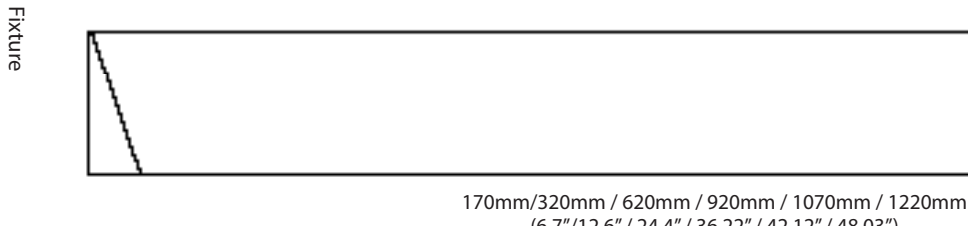

Top View

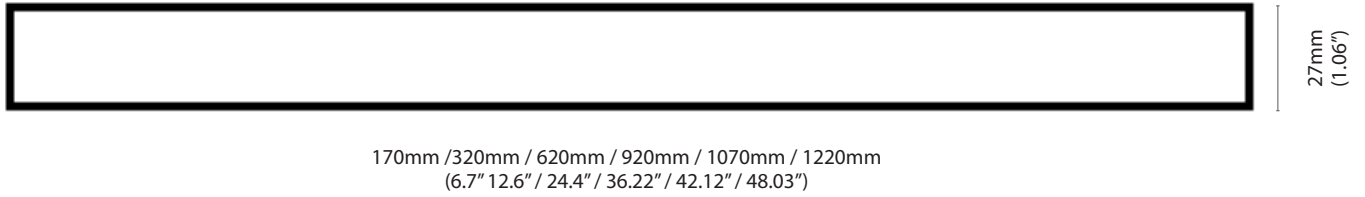


Cable length

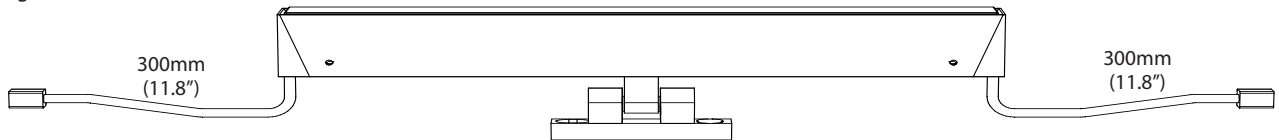


Surface (S)

Installation Options

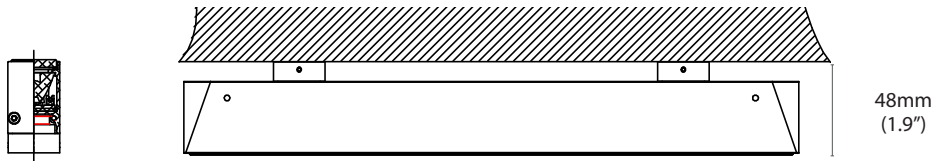

Adjustable bracket (A)

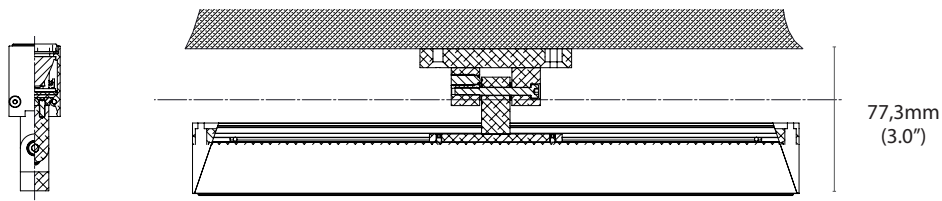

Extended adjustable bracket (AE)

