

# HEMERA

## Specification Sheet



### Ordering Information

Model	Length	Power	Color Temp.	Optics	Voltage	Installation Options
HM	170	L	27	SP	24	S A EA
	320		30			
	620	H	40			
	920		RGBW			
	1070		27			
	1220		30			
			40			
			RGBW			



### Application

- Architectural and landscape lighting
- Surface mounted projector
- Adjustable brackets
- Wall grazing effect
- UL STD 1598, IP65, Wet location

### Luminaire

- Continuous run of standard lengths up to 10m (33') plug and play
- IN - OUT IP67 connector (10m run)
- High performance silicone optics
- Extruded anodized aluminium body, powder coated
- Tempered glass cover, opal
- Multiple installation options
- Supplied with oil and water resistant feed cable and IP67 connector - 300mm (12")
- Remote power supply
- IK07

### Color Temperature

- 27 - 2700K
- 30 - 3000K
- 40 - 4000K
- RGBW
- 2 Step MacAdam
- CRI: > 85

### Optics

- SP - 15°x60°

### Voltage

- 24 - 24VDC fixture voltage

### Installation Options

- S - Surface
- A - Adjustable bracket
- EA - Extended adjustable bracket


### Cable options

- Jumper Cable
- 201741 - L= 1m (3,3')
- Lead Cable
- 201734 - L= 1m (3,3')

### POWER SUPPLIES

List of proposed power supplies that are to be ordered separately. Please click [link](#) for list of available drivers.

Click [here](#) for voltage drop and distances.

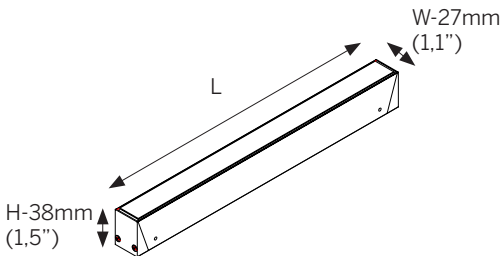

### Length

- 170mm (6,7")
- 320mm (12,6")
- 620mm (24,4")
- 920mm (36,2")
- 1070mm (42,1")
- 1220mm (48")

### Power - Delivered lumens

- H - 23W/m, 2700 lm/m
- L - 10W/m, 1200 lm/m
- H - 24W/m, RGB

International: +385 52 255 324 [filixlighting.com](http://filixlighting.com)  
[info@filixlighting.com](mailto:info@filixlighting.com)  
 Europe/GmbH: [info@filixlighting.com](mailto:info@filixlighting.com)  
 Europe MENA: [info@filixlighting.com](mailto:info@filixlighting.com)  
 North America: [filixlighting-usa.com](http://filixlighting-usa.com) [info@filixlighting.com](mailto:info@filixlighting.com)

Filix reserves the right to make technical changes without notice.

# HEMERA

## Dimensions




Note:

For details on specific depths, tiling thickness and other please refer to both Installation instructions for fixture and housing.


### Installation details

Installation details

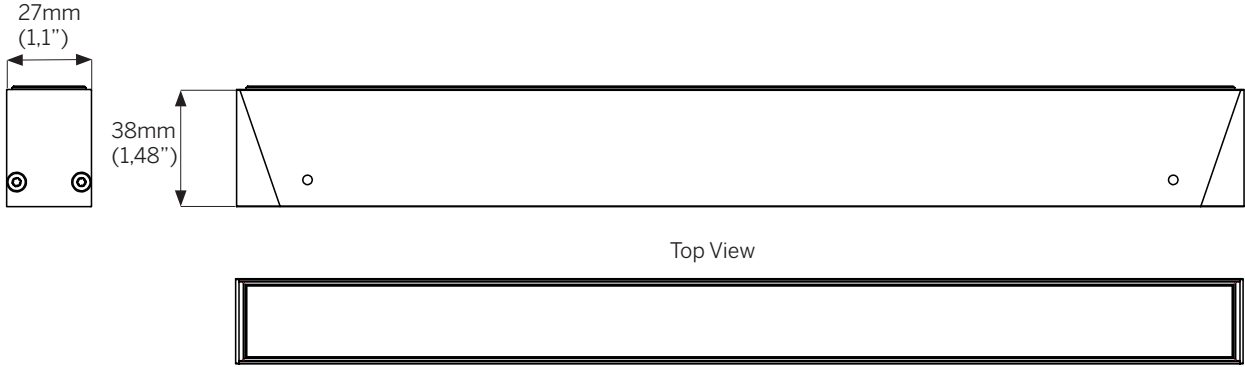



170mm/320mm/620mm/920mm/1070mm/1220mm  
(6.7"/12.6"/24.4"/36.22"/42.12"/48.03")

### Cable length





Installation options



### Surface (S)

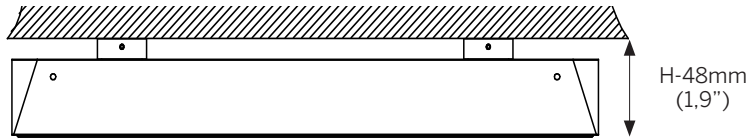

### Adjustable bracket (A)

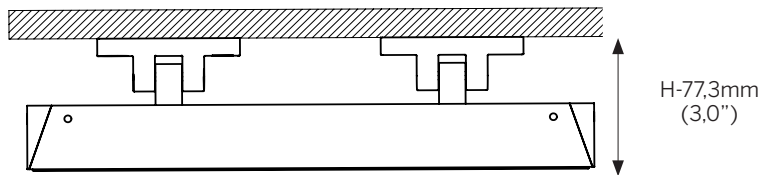

### Extended adjustable bracket (AE)

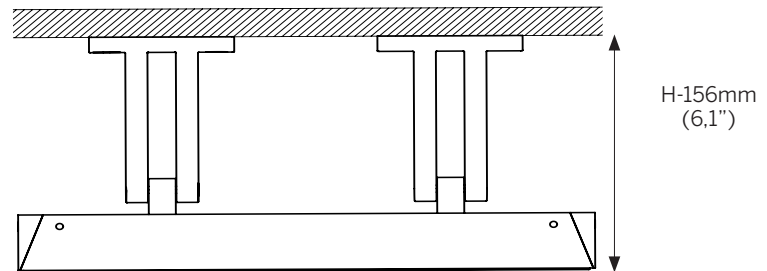

International: +385 52 255 324 [filixlighting.com](http://filixlighting.com)

[info@filixlighting.com](mailto:info@filixlighting.com)

Europe/GmbH: [info@filixlighting.com](mailto:info@filixlighting.com)

Europe MENA: [info@filixlighting.com](mailto:info@filixlighting.com)

North America: [filixlighting-usa.com](http://filixlighting-usa.com) [info@filixlighting.com](mailto:info@filixlighting.com)

Filix reserves the right to make technical changes without notice.