

HEMERA WALL

Specification Sheet



Ordering Information						
Model	Length	Power	Optics	Voltage	Installation Options	
HM				24		
HMW	1070 1220	H L	27 30 40 27 30 40	24 230	WM PD	



Application

- Architectural and landscape lighting
- Surface mounted
- Installation profile or rod
- Wall grazing effect or marker light
- UL STD 1598, IP66, Wet location

Luminaire

- Continuous run of standard lengths up to 10m (33') plug and play
- IP67 connector
- High performance silicone optics, diffused or reflector
- UL STD 1598, IP66
- Extruded anodized aluminium body, powder coated
- Tempered glass cover
- Multiple installation options
- Supplied with oil and water resistant feed cable and IP68 connector - 300mm (12")
- Remote power supply

Color Temperature

- 27 - 2700K
- 30 - 3000K
- 40 - 4000K
- 2 Step MacAdam
- CRI: > 85

Optics

- SP - 15° angle - linear graze
- LL - opal diffused
- R - Reflector/louvre

Voltage

- 24 - 24VDC fixture voltage

Installation Options

- WM - Wall Mount
- WM - Pendant

Length


- 1070mm (42.12")
- 1220mm (48.03")

Power

- H - 23W/m, 3150 lm/m
 - L - 10W/m, 1500 lm/m
- (delivered lumen output)

Power Supply

On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)

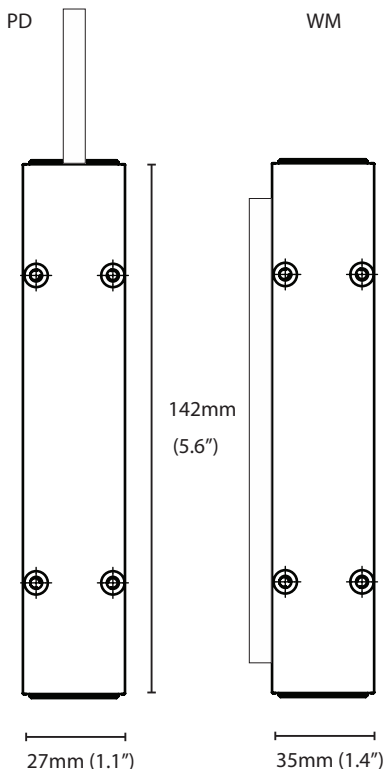

International: +385 52 255 324 filixlighting.com info@filixlighting.com
 Europe/GmbH: info@filixlighting.com
 Europe MENA: info@filixlighting.com
 North America: filixlighting.com info@filixlighting.com

Click [here](#) for voltage drop and distances.