

HYPERION

Specification Sheet



Ordering Information

Model	Height	Power	Color Temp.	Optics	Light Side	Paint	Options
HY	M L	L	27 30 40	W D	1 2	W AT BK	D V



Application

- Architectural and landscape lighting
- Surface mount
- Anchor installation
- 2 apertures, 2 beam angles
- UL STD 1598, IP66, Wet location

Luminaire

- Aluminium structure body
- Anodized
- Base for feed through connection
- Recessed lens
- Powder coated body
- Aluminium construction
- Integrated power supply
- RAL 9003, RAL 7016, RAL 9005 powder coat
- Junction box 4x5mm² - IN/OUT
- IK10

Color Temperature

- 27 - 2700K
- 30 - 3000K
- 40 - 4000K
- 2 Step MacAdam
- CRI: > 85

Optics

- W - Wide beam
- D - Deep beam

Constant Voltage

- 110-240V

Finish

- W - RAL 9003 Structure (white)
- AT - RAL 7016 Structure (grey anthracite)
- BK - RAL 9005 Structure (black)

Options

- D - DALI
- V - 0-10V


Accessories

- 201761 - Installation Anchor (h400mm)

POWER SUPPLIES

List of proposed power supplies that are to be ordered separately.
Please click [link](#) for list of available drivers.

Click [here](#) for voltage drop and distances.


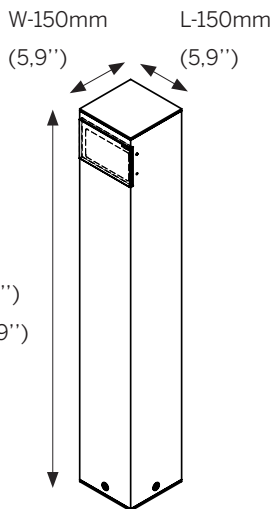


Height

- M - 450mm (16")
- M - 1000mm (39")

Power - Delivered lumens

- L - 9W, 2700K - 4000K, 407lm - 1 side
- L - 18W, 2700K - 4000K, 815lm - 2 side

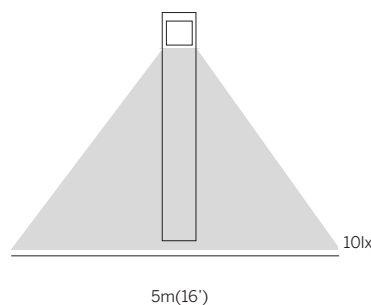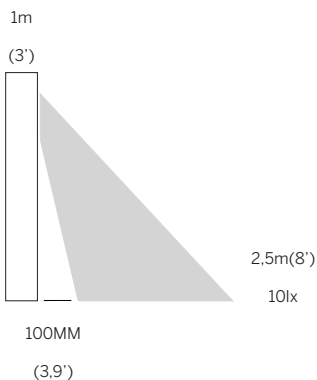

International: +385 52 255 324 filixlighting.com info@filixlighting.com
 Europe/GmbH: info@filixlighting.com
 Europe MENA: info@filixlighting.com
 North America: filixlighting.com info@filixlighting.com

Filix reserves the right to make technical changes without notice.