

ION Switch

Specification Sheet



Ordering Information						
Model	Height	Power	Color Temp.	Optics	Finish	Options
IN	M L	L	27 30 40	QM	W AT BK	D V



Application

- Architectural and landscape lighting
- Surface mount
- Anchor installation
- 4 apertures, 5 light effects
- Switch for angle adjustment
- UL STD 1598, IP66, Wet location

Luminaire

- Aluminum structure body
- Anodized and painted body
- Base for feed through connection
- Recessed lens
- On site head movement 360° degrees
- Integrated power supply
- Finish powder coat RAL9003/RAL7016 RAL9005 structure
- IP55 junction box
- IK10

Height

- M - 400mm (15,8")
- L - 950mm (37,4")

Power - Delivered lumens

- L = 23W, 2700K-4000K, 865 lm (360 degrees)

Color Temperature

- 27 = 2700K
- 30 = 3000K
- 40 = 4000K
- 2 Step MacAdam
- CRI: > 85

Optics

- QM - 0-360° (switch)

Constant Voltage

- 120-240V

Finish

- W - RAL 9003 Structure (white)
- AT - RAL 7016 Structure (grey antracite)
- BK - RAL 9005 Structure (black)

Options

- D - DALI
- V - 0-10V


Accessories

- 201846 - Installation Anchor (H-400mm)

POWER SUPPLIES

List of proposed power supplies that are to be ordered separately. Please click [link](#) for list of available drivers.

Click [here](#) for voltage drop and distances.

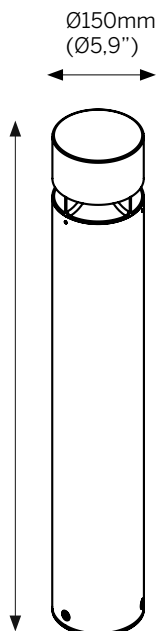

ION Switch

Dimensions





Note:
For details on specific depths, tiling thickness and other please refer to both Installation instructions for fixture and housing.

Installation details

MANUAL ON SITE LIGHT INTENSITY/DISTRIBUTION SWITCH






ON SITE HEAD MOVEMENT 360° WITH LOCK
Allows ON SITE manual head adjustment
for change of light distribution angle or
fine tuning.

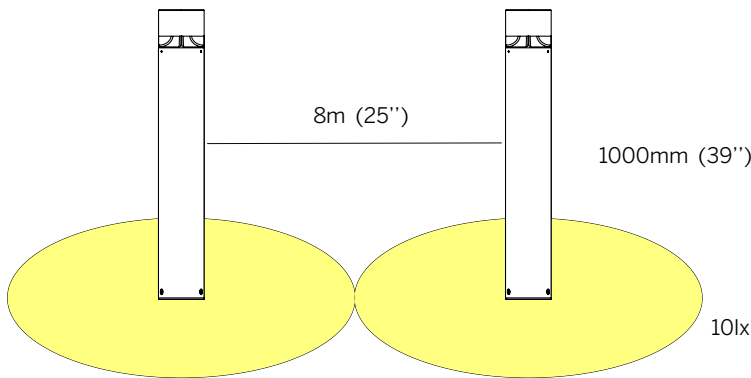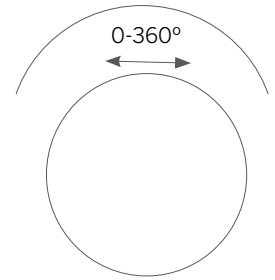

Dimension/Detail

Installation/Detail

Anchor set

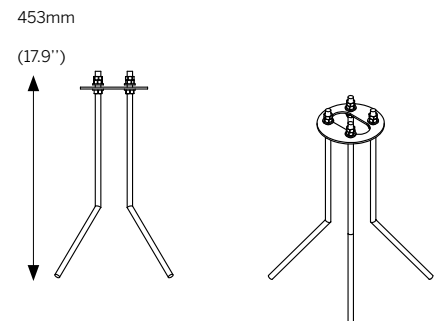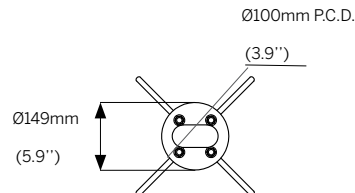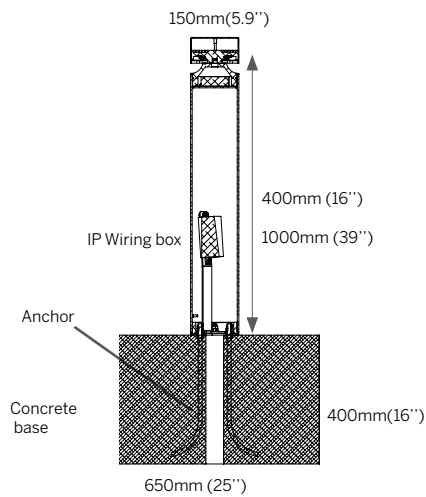

International: +385 52 255 324 filixlighting.com info@filixlighting.com
 Europe/GmbH: info@filixlighting.com
 Europe MENA: info@filixlighting.com
 North America: filixlighting.com info@filixlighting.com

Filix reserves the right to make technical changes without notice.