

# RCP200 Paver

## Specification Sheet



### Ordering Information

Model	Installation	Power	Color Temp.	Optics	Voltage	Options
RCP200	TS	H	27 30 40 RGB	LL	24	C* C3 C6 C9



### Application

- Large public and hotel areas
- Architectural and landscape lighting
- Marker light
- Recessed floor installation
- Gravel, soil or concrete
- UL STD 1598, IP67, Wet location, drive over rated 1500KG (3300 lb)

### Luminaire

- Sustainable design, replaceable LED module
- Remote power supply
- Anti slip tempered glass 15mm (5/8") thick, with inner opal film to create marker light
- Slip resistance certified to DIN 51130: classification R 11
- Stainless steel type 304 construction
- Direct concrete pour housing
- Snap in installation with no exposed hardware
- Supplied with oil and water resistant 0.3m (1') feed cable as standard C\*
- IK10

### Color Temperature

- 27 - 2700K
- 30 - 3000K
- 40 - 4000K
- RGB
- 2 Step MacAdam
- CRI: > 85

### Optics

- LL - 120° even illumination

### Voltage

- 24 - 24VDC fixture voltage

### Options

- C\* - standard feed cable 0.3m (1')
- C3 - luminaire supplied with 3m (10') feed cable
- C6 - luminaire supplied with 6m (20') feed cable
- C9 - luminaire supplied with 9m (30') feed cable

### Installation

- TS - Trimless

### Power- Delivered lumens


- H - 4,8W, 2700K - 4000K, 530lm
- H - 6W, RGB

### Installation housing

- RC200

### POWER SUPPLIES

List of proposed power supplies that are to be ordered separately.  
Please click [link](#) for list of available drivers.  
Click [here](#) for voltage drop and distances.

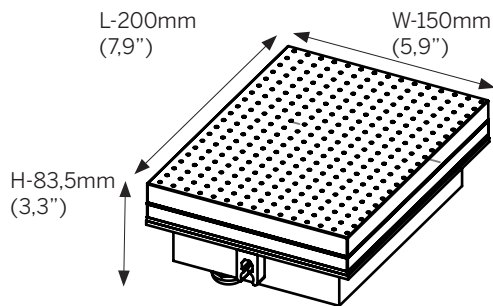

International: +385 52 255 324 [filixlighting.com](mailto:info@filixlighting.com)  
[info@filixlighting.com](mailto:info@filixlighting.com)  
 Europe/GmbH: [info@filixlighting.com](mailto:info@filixlighting.com)  
 Europe MENA: [info@filixlighting.com](mailto:info@filixlighting.com)  
 North America: [filixlighting-usa.com](mailto:filixlighting-usa.com) [info@filixlighting.com](mailto:info@filixlighting.com)  
 Filix reserves the right to make technical changes without notice.

# RCP200 Paver

## Dimensions




### Note:

For details on specific depths, tiling thickness and other please refer to both Installation instructions for fixture and housing.


### Installation housing - RC200

Installation details

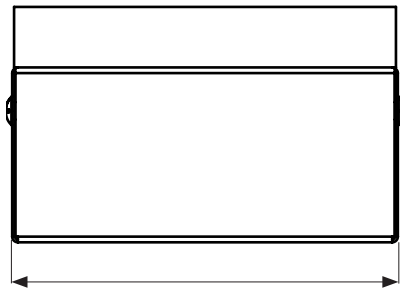


204mm  
(8")

125mm  
(4.9")

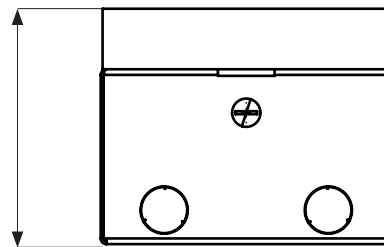

154mm  
(6.1")



International: +385 52 255 324 [filixlighting.com](http://filixlighting.com)  
[info@filixlighting.com](mailto:info@filixlighting.com)

Europe/GmbH: [info@filixlighting.com](mailto:info@filixlighting.com)

Europe MENA: [info@filixlighting.com](mailto:info@filixlighting.com)

North America: [filixlighting-usa.com](http://filixlighting-usa.com) [info@filixlighting.com](mailto:info@filixlighting.com)

Filix reserves the right to make technical changes without notice.