

RDW35 Wall Wash

Specification Sheet



Ordering Information¹

Model	Installation	Power	Color Temp.	Optics	Voltage	Options
RDW35				WW	24	
RDW35	TM TS	L H	27 30 40	WW	24	C* C3 C6 C9



Application

- Architectural and landscape lighting
- Recessed (floor/wall) installation
- Gravel, soil or concrete
- Wall wash, floor wash
- UL STD 1598, IP67, Wet location

Luminaire

- Sustainable design, replaceable LED module
- AGS - Anti Glare System - GLARE FREE
- High performance optics
- IP 67, UL STD 1598, wet location, drive over rated 1500 kg (3000 lb)
- Remote power supply
- Clear tempered glass
- Aluminium construction body, direct concrete pour housing, Stainless steel flange
- Snap in installation with no exposed hardware
- Supplied with oil and water resistant 0.3m (1') feed cable standard, single color 2x1mm² (18AWG)

IK09

Size

- ø 39mm (1.53"), H 100mm (4")
- ø 45mm (1.77"), H 100mm (4")

Installation

- Trim (TM)
- Trimless (TS)

Power - Delivered lumens

- L - 1,2W 2700K - 4000K - 14 lm
- H - 3W 2700K - 4000K - 32 lm

Color Temperature

- 27 - 2700K
- 30 - 3000K
- 40 - 4000K
- 2 Step MacAdam
- CRI: > 85

Optics

- WW - WallWash - 26x37° tilt 14°

Voltage

- 24 - 24Vdc fixture voltage

Options


- C* - standard feed cable 0.3m (1')
- C3 - luminaire supplied with 3m (10') feed cable
- C6 - luminaire supplied with 6m (20') feed cable
- C9 - luminaire supplied with 9m (30') feed cable

Installation housing order codes

- RD35C - Concrete
- RD35T - Tiles


Trim (TM)

45mm ø
(1.77")



Trimless (TS)

39mm ø
(1.53")



h 78mm
(3.05")

Power Supply

On/Off

- 103233 - OT60 24V P
- 103196 - OT130 24V P
- 103234 - OT250 24V P

Power Supply integrated controls

- 102345 - ELDOLED Linear 100S (DXM,DALI+PS)
- 103502 - OT 210/220-240 /1-4CH - DALI
- 103507 - OT250/220...240/ 24V DIM P (1-10V)

Click [here](#) for voltage drop and distances.

International: +385 52 255 324 filixlighting.com info@filixlighting.com

Europe/GmbH: info@filixlighting.com

Europe MENA: info@filixlighting.com

North America: filixlighting.com info@filixlighting.com


Filix reserves the right to make technical changes without notice.

RDW35 Wall Wash

Dimensions




Optics Accessories

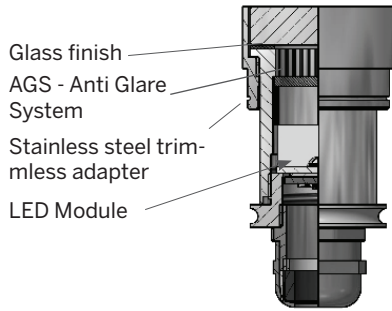


Floor/Wall - Tiles

Concrete Installation Housing (C)

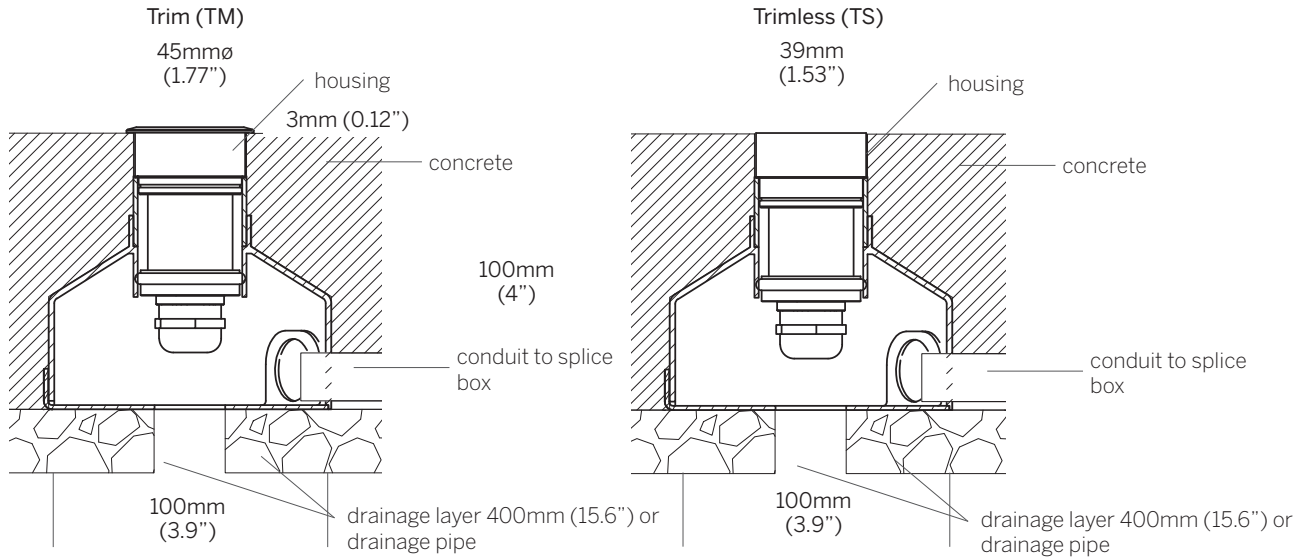

Tiles Installation housing (T)

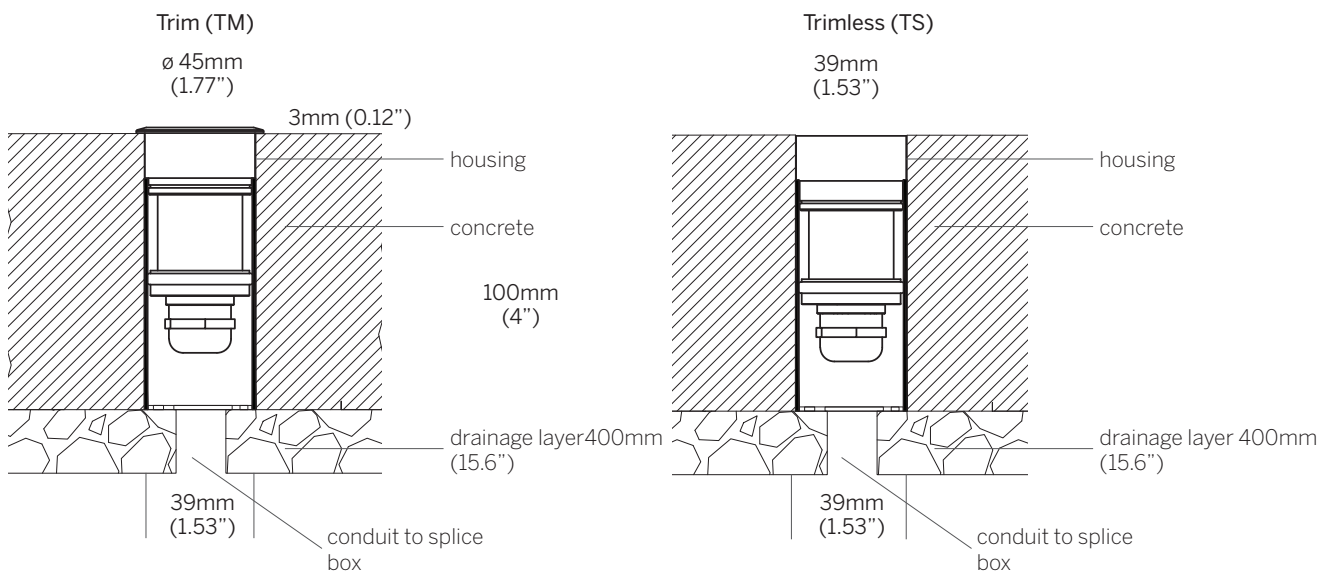

International: +385 52 255 324 filixlighting.com info@filixlighting.com
 Europe/GmbH: info@filixlighting.com
 Europe MENA: info@filixlighting.com
 North America: filixlighting.com info@filixlighting.com

Filix reserves the right to make technical changes without notice.