




Continuous linear line of light for outdoor and indoor use. Stainless steel housing with flush glass lens for trimless integration into floor. Drive over rated 3000kg (6000lb).

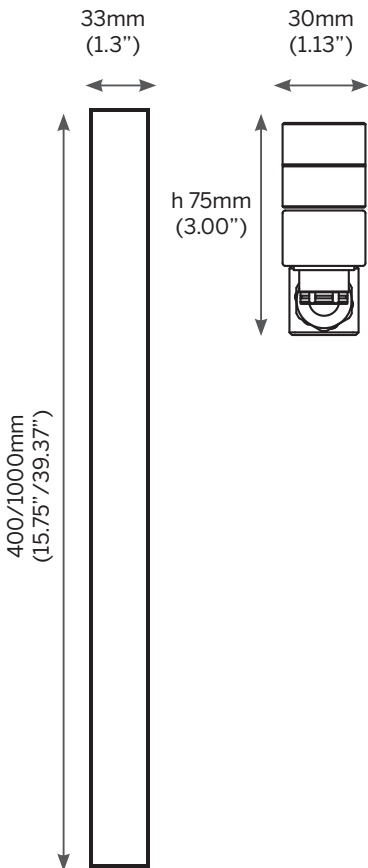

### Ordering Information<sup>1</sup>

Model	Length	Power <sup>2</sup>	Color Temp.	Optics	Voltage	Options
SL	400 1000	L  H	27 30 40 B RGB  27 30 40 RGBW	LL	24	C* C3 C6 C9

### Luminaire

- Continuous run of standard lengths (See technical pages for details)
- UL STD 1598, wet location, IP67, drive-over rated 3000kg (6000 lb)
- Remote power supply
- Stainless steel 304 body
- Clear glass 2x 15mm (5/8") thick, with inner opal film to create even line of light
- Installation housing - stainless steel 304 construction, direct concrete pour
- Cross section 30mm (1.3") (W), 90mm (3.54") (H)
- Supplied with oil and water resistant 1m (3.3') feed cable standard, single color 2x1mm<sup>2</sup>, RGB 4x1mm<sup>2</sup> (18AWG)

### Length

- 401mm (15.7") OAL
- 1001mm (39.4") OAL

### Power<sup>2</sup>

- L - 10W/m 2700K - 4000K, 660 lm/m
- L - 10W/m Blue, 528 lm/m
- L - 17W/m RGB:  
R93 lm/m, G208 lm/m, B48 lm/m
- H - 23/m 2700K - 4000K, 1650 lm/m
- H - 30W/m RGBW:  
15W/m RGB  
R93 lm/m, G208 lm/m, B48 lm/m  
15W/m White

### Power Supply<sup>1</sup>

#### On/Off

- 101074 - OT80 24V P
- 101402 - OT120 24V P
- 101043 - OT240 24V P

#### Power Supply integrated controls

- 100721 - OT80 24V DIM P (1-10V)

### Color Temperature

- 27 - 2700K
- 30 - 3000K
- 40 - 4000K
- B - Blue
- RGB/RGBW
- 2 Step MacAdam
- CRI: > 85

### Optics

- LL - even illuminated line of light

### Voltage

- 24 - 24Vdc fixture voltage

### Options

- C\* - standard feed cable 1m (3.3')
- C3 - luminaire supplied with 3m (10') feed cable
- C6 - luminaire supplied with 6m (20') feed cable
- C9 - luminaire supplied with 9m (30') feed cable

### Installation housing order codes

- SL315- 401mm
- SL317- 1001mm

- 100720 - OT120 24V DIM P (1-10V)
- 101093 - OT240 24V DIM P (1-10V)

#### Controls

- 101046 - OT DIM 1-10V 120W
- 101047 - OTI DALI DIM 120W

# Step Up Slim

Dimensions

