


ZERO G

Specification Sheet



Linear graze light with high performance optics for outdoor and indoor use. Stainless steel housing with flush tempered glass lens for trimless integration into floor surface. Zero glare. Drive over rated.

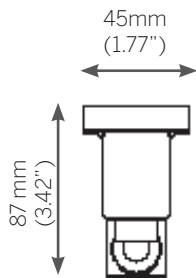

Ordering Information¹

| Model | Length | Power ² | Color Temp. | Optics | Voltage | Options |
|-------|---------------------------|--------------------|----------------------|--------|---------|---------|
| ZG | 174 324 624 1224 | H | 27 30 40 TW | GR | 24 | |

¹Specify remote power supply separately below.

Luminaire

- Continuous run of standard lengths, in/out feed
- UL STD 1598, wet location, IP67, drive over rated 1500kg (3000 lb)
- Linear optics/no discoloration
- Remote power supply
- Stainless steel 304 body
- Clear tempered glass 10mm (3/8") thick
- Installation housing stainless steel 304 construction, direct concrete pour
- Cross section 50mm (1.96") (W), 120mm (3.62") (H)
- Supplied with oil and water resistant standard feed cable IN/OUT connector, single color 2x1,5mm²*

Length

- 174mm (6.85") OAL
- 324mm (12.6") OAL
- 624mm (24.4") OAL
- 1224mm (48") OAL

Optimal fixture positioning

- 50mm-100mm from wall - height 10m

Power²

- H - 39W/m, 1050 lm/m

*10m continuous run from one power supply

Color Temperature

- 27 - 2700K
- 30 - 3000K
- 40 - 4000K
- TW - 2200K - 6000K
- 2 Step MacAdam
- CRI: > 85

Optics

- GR - Graze

Voltage

- 24 - 24Vdc fixture voltage

Installation housing order codes

- ZG174 - 174mm
- ZG324 - 324mm
- ZG624 - 624mm
- ZG1224 - 1224mm

Power Supply¹

On/Off

- 101074 - OT80 24V P
- 101402 - OT120 24V P
- 101043 - OT240 24V P

Power Supply integrated controls

- 100721 - OT80 24V DIM P (1-10V)

- 100720 - OT120 24V DIM P (1-10V)
- 101093 - OT240 24V DIM P (1-10V)

Controls



- 101046 - OT DIM 1-10V 120W
- 101047 - OTI DALI DIM 120W
- 101202 - OT RGB DMX DIM

ZERO G

Dimensions




Fixture

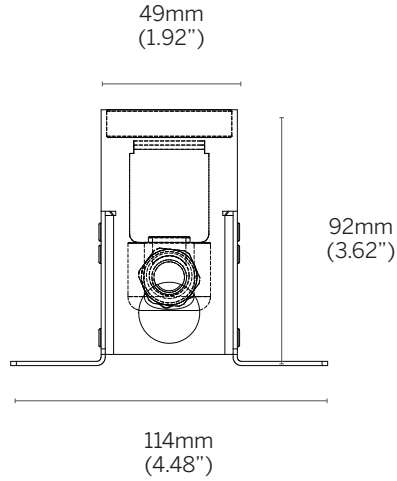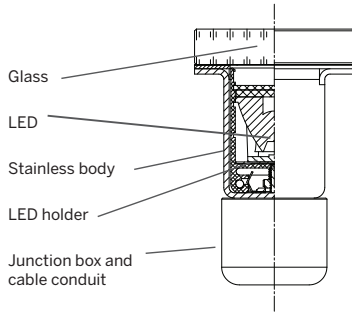


Fixture

170mm / 320mm / 620mm / 1220mm
(6.85" / 12.6" / 24.4" / 48")

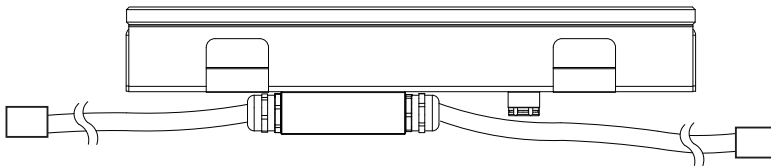

***IP rated connector**
Cable lead 300mm longer than fixture

Installation

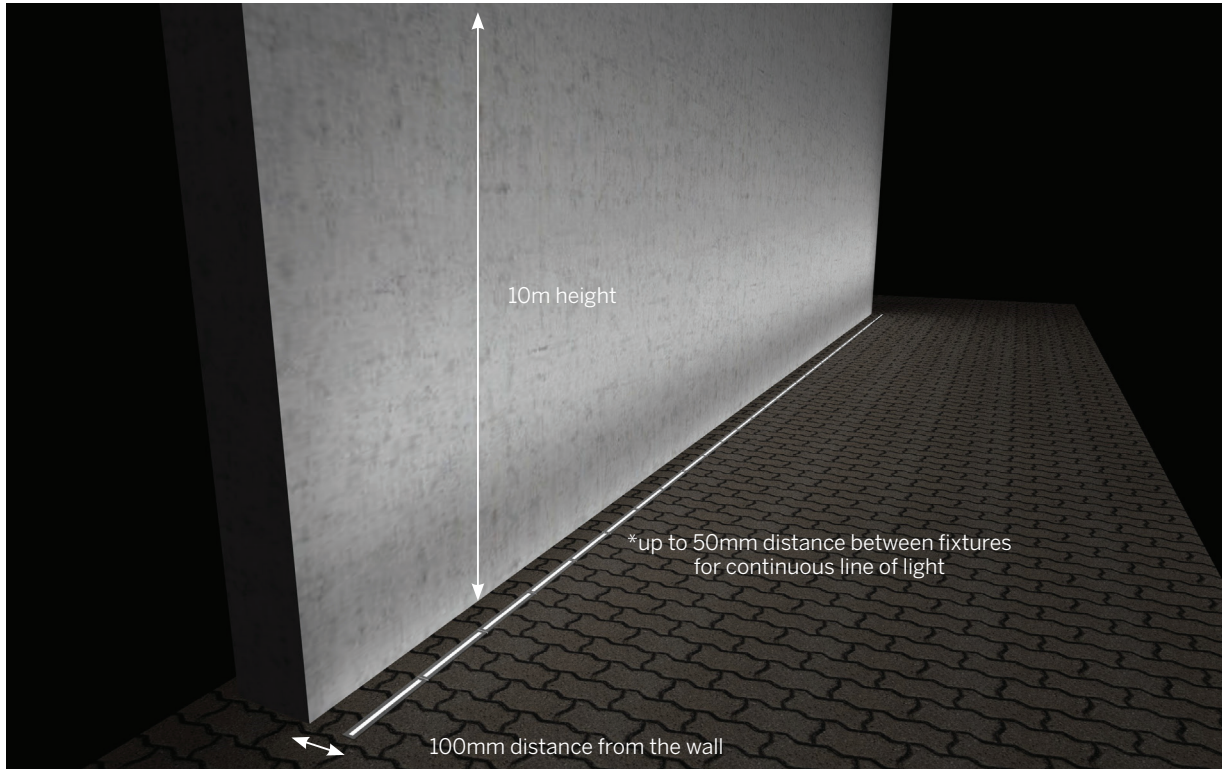

*from 50mm to 100mm distance from the wall for best grazing performance.