



Arpool XM Projector

Specification Sheet



UL STD 676

water feature and fountain rated

IP68

LUMINAIRE FEATURES

Design and Application

- Installation depth max. up to 3m (10')
- Glare reduction accessory - snoot
- DMX, DALI, 0-10V compatible (remote)
- Surface mount (floor/wall) installation
- Underwater architectural / landscape lighting
- Fountains and water features

Performance

- IK10, Tempered glass, crystal clear
- Chlorine and saline environment
- Stainless Steel type 316L, marine grade
- Galvanic current protection
- Thermal fold back technology
- LED Lifetime TM-21 @ 105°C
L80(24K) = 145,000 hours
- Supplied with oil and water resistant
3m (10') feed cable as standard
- CRI: > 85
- 3 Step MacAdam

Safety

- Remote power supply
- Low voltage operation

Sustainability

- Recyclable material


Accessories

- 202865 - Adjustable waterproof wall duct
17mm-25mm (0,66"- 0,98")


Power supplies

- List of proposed power supplies that are to be ordered separately.
- Click [here](#) for list of available drivers.
- Click [here](#) for voltage drop and distances.

FAXMP

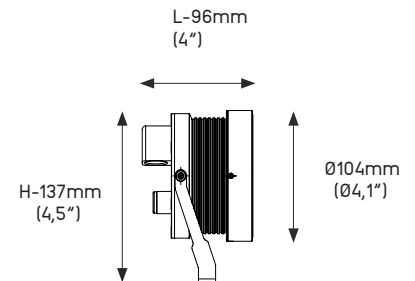

FAXMPS

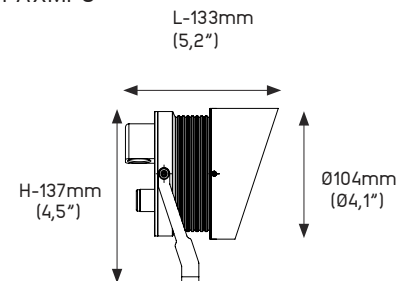

Note

Underwater luminaire – must be constantly submersed.

Click [here](#) to download fixture installation manual.

Click [here](#) to download CAD file.

Click [here](#) to download IES-LTD data.



Arpool XM Projector

ORDERING INFORMATION

MODEL

FAXMP

- FAXMP - H-137mm x Ø104mm x L-96mm
(H-4,5"x Ø4,1"x L-4")

FAXMPS

- FAXMPS - H-137mm x Ø104mm x L-133mm
(H-4,5"x Ø4,1"x L-5,2")

POWER

L

- L - 21W 3000/4000K, 1700 lm
- L - 21W RGBW (W 4000K)

COLOR TEMP.

27

- 27 - 2700K

30

- 30 - 3000K

40

- 40 - 4000K

TW

- TW - Tunable white (2200-4000K)

RGBW

- RGBW (W 4000K)

OPTICS

SP

- SP - Spot - 15°

FL

- FL - Flood - 40°

W

- W - Wide - 70°

SE

- SE - Elliptical - 20°x 120°

SPX

- SPX - Spot - 15° + hex

FLX

- FLX - Flood - 40° + hex

WX

- WX - Wide - 70° + hex

SEX

- SEX - Elliptical - 20°x 120° + hex

VOLTAGE

12

- 12 - 12VDC fixture voltage

24

- 24 - 24VDC fixture voltage

OPTIONS

3

- 3* - standard feed cable 3m (10')

6

- 6 - luminaire supplied with 6m (20') feed cable

9

- 9 - luminaire supplied with 9m (30') feed cable

20

- 20 - luminaire supplied with 20m (65') feed cable

GLARE CONTROL

1


- 1 - Half moon



Arpool XM Projector

ACESSORIES

Waterproof wall duct - 202865

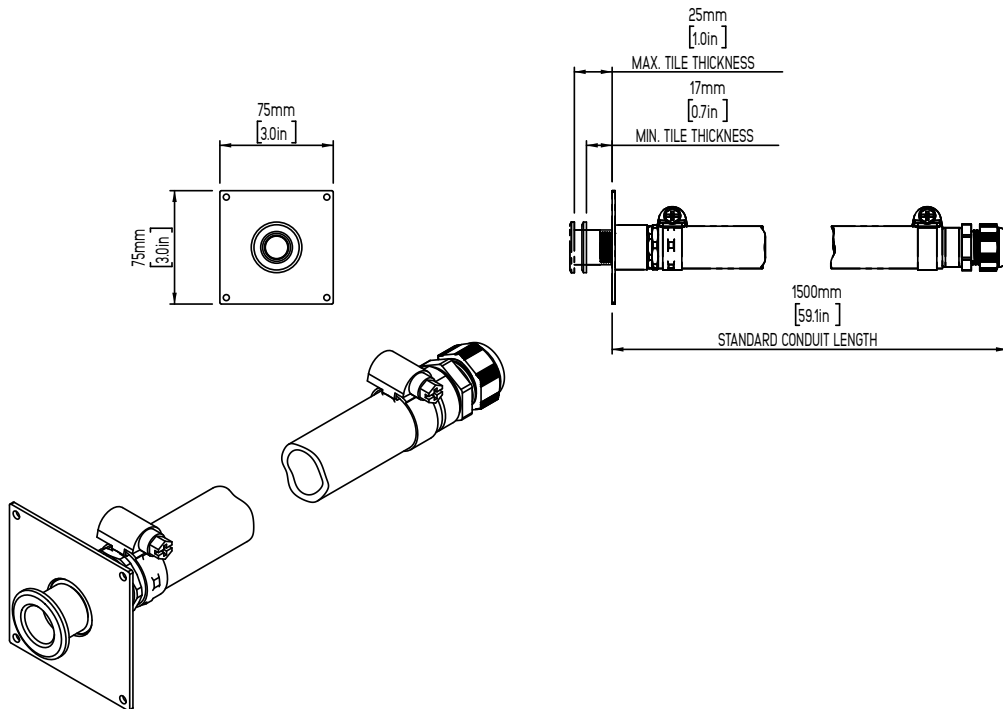

Note:
For details on specific depths, tiling thickness and other please refer to both Installation instructions for fixture and housing.