




Eter

Specification Sheet

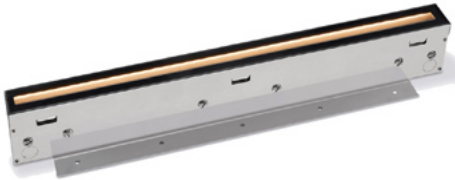

UL STD 1598
IP67

LUMINAIRE FEATURES

Design and Application

- Architectural and landscape lighting
- Recessed floor/wall installation
- Linear wall/floor wash
- Gravel, soil or concrete
- UL STD 1598, IP67, Wet location, drive over rated 1500 kg (3300lb)

Performance

- IK10, Tempered glass, crystal clear
- Continuous run of standard lengths
- Remote power supply
- Stainless steel type 304 body
- Snap in installation with no exposed hardware
- Galvanic current protection (installation housing)
- Lifetime TM-21 @85C L90(9K)=60000h
- Supplied with oil and water resistant 1m (3,3') feed cable as standard
- CRI: > 85
- 2 Step MacAdam

Safety

- Remote power supply
- Low voltage operation
- Recessed installation

Optimal fixture positioning

- 300mm (11,8") from wall - wall height 3m (10')
- Max. 130mm(5,1") between fixtures for continuous light effect

Sustainability

- Recyclable material
- Replaceable LED module

Installation housing


- LIN174 - 6,9" (174mm)
- LIN324 - 12,8" (324mm)
- LIN624 - 24,6" (624mm)
- LIN1224 - 48,2" (1224mm)

Accessories

- 200886 - Removal tool

Power supplies

- List of proposed power supplies that are to be ordered separately.
- Click [here](#) for list of available drivers.
- Click [here](#) for voltage drop and distances.

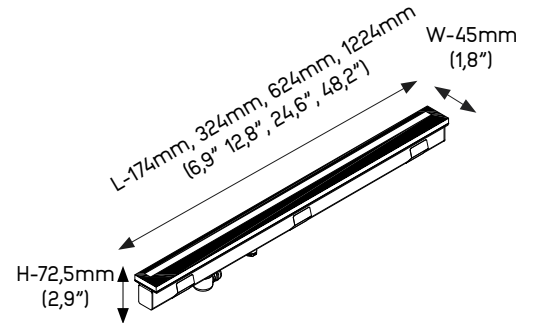

Click [here](#) to download fixture installation manual.
Click [here](#) to download housing installation manual.
Click [here](#) to download CAD file.
Click [here](#) to download IES-LTD data.



Eter

ORDERING INFORMATION

MODEL

FET

LENGTH

- | | |
|----|------------------|
| 6 | • 6,9" (174mm) |
| 12 | • 12,8" (324mm) |
| 24 | • 24,6" (624mm) |
| 48 | • 48,2" (1224mm) |

POWER

- | | |
|---|---------------------------------------|
| H | • H - 7W/ft, 2700K - 3000K, 280 lm/ft |
|---|---------------------------------------|

COLOR TEMP.

- | | |
|----|--------------|
| 27 | • 27 - 2700K |
|----|--------------|

- | | |
|----|--------------|
| 30 | • 30 - 3000K |
|----|--------------|

- | | |
|------|------------------|
| RGBW | • RGBW (W 3000K) |
|------|------------------|

OPTICS

- | | |
|----|-------------------------|
| WW | • WW - Wallwash28° tilt |
|----|-------------------------|

VOLTAGE

- | | |
|----|------------------------------|
| 24 | • 24 - 24VDC fixture voltage |
|----|------------------------------|

OPTIONS

- | | |
|---|---|
| 3 | • 3 - luminaire supplied with 3m (10') feed cable |
|---|---|

- | | |
|---|---|
| 6 | • 6 - luminaire supplied with 6m (20') feed cable |
|---|---|


- | | |
|---|---|
| 9 | • 9 - luminaire supplied with 9m (30') feed cable |
|---|---|




Eter

INSTALLATION DETAILS

Installation housing - LIN174 / LIN324 / LIN624 / LIN1224

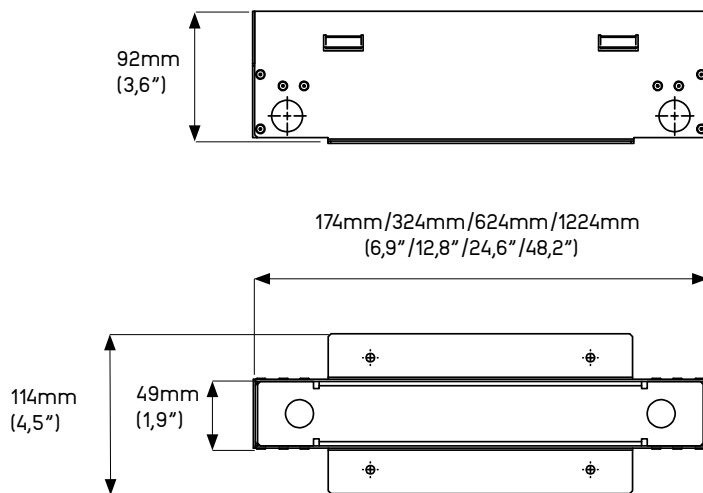

For countinuous light max lenght between illuminares max. 130mm (5,1')

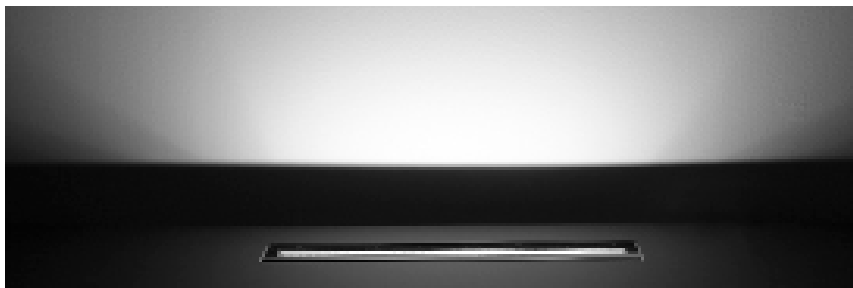

For 3m (10') wall illumination, please install illuminares 300mm (11,8') from the wall.

Note:
For details on specific depths, tiling thickness and other please refer to both Installation instructions for fixture and housing.