




Step Up Slim Corner

Specification Sheet

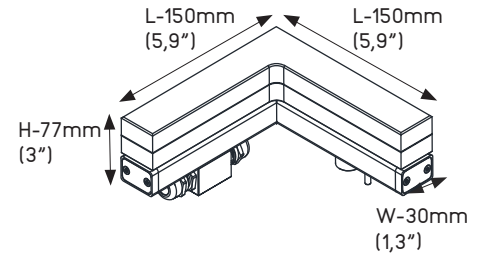

UL STD 1598
IP67

LUMINAIRE FEATURES

Design and Application

- Architectural and landscape lighting
- Recessed floor installation
- Gravel, soil or concrete installation
- UL STD 1598, IP67, Wet location, drive over rated 3000 kg (6600lb)

Performance

- IK10, laminated & tempered glass, chemically etched
- Continuous run of standard lengths
- Stainless steel type 304 body
- Snap in installation with no exposed hardware
- Lifetime TM-21 @85C L90(9K)=60500h
- Supplied with oil and water resistant feed cable which length matches the length of a fixture
- CRI: > 85
- 2 Step MacAdam

Safety

- Remote power supply
- Low voltage operation
- Recessed installation

Sustainability

- Recyclable material

Installation housing

- SLC - 5,9" x 5,9" (150x150mm)

Accessories

- 200886 - Removal tool

Power supplies

- List of proposed power supplies that are to be ordered separately.
- Click [here](#) for list of available drivers.
- Click [here](#) for voltage drop and distances.

Click [here](#) to download fixture installation manual.
Click [here](#) to download housing installation manual.
Click [here](#) to download CAD file.
Click [here](#) to download IES-LTD data.



Step Up Slim Corner

ORDERING INFORMATION

MODEL

FSLC

LENGHT

C0150

- 150mm x 150mm (5,9" x 5,9")

POWER

L

- L - 3W/ft, 2700K - 3000K, 45 lm

H

- H - 7W/ft, 2700K - 3000K, 90lm
- H - 7W/ft, RGBW (W 3000K)

COLOR TEMP.

27

- 27 - 2700K

30

- 30 - 3000K

RGBW

- RGBW (W 3000K)

OPTICS

LL

- LL = 120° even illumination

VOLTAGE

24

- 24 - 24 VDC fixture voltage

OPTIONS

3

- 3 - luminaire supplied with 3m (10') feed cable * 24V only

6

- 6 - luminaire supplied with 6m (20') feed cable * 24V only

9


- 9 - luminaire supplied with 9m (30') feed cable * 24V only



Step Up Slim Corner

INSTALLATION DETAILS

Installation housing - SLC

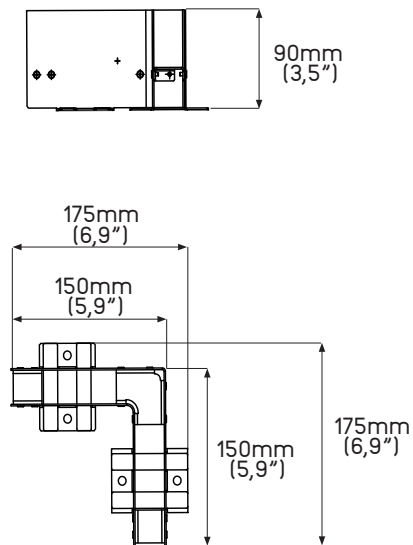

Note:
For details on specific depths, tiling thickness and other please refer to both Installation instructions for fixture and housing.